

STM-2

USB THIN FILM THICKNESS / RATE DEPOSITION MONITOR



SYCON STM-2

The STM-2 is the most accurate USB-powered Thin Film Thickness/Rate Deposition Monitor in the industry. In the lab it can provide precise results and control for your thickness or mass deposition experiments. Using the USB connection, the provided LabVIEW™ software and your lab PC, it allows quick installation, and makes obtaining accurate results for your film or mass measurement experiments simple and easy. For production, the STM-2's compact size and simple installation make process set-up and operation easy and efficient. The on board oscillator further reduces system cost when sensing head can be located 30" or less from the STM-2. If longer cable lengths are required the STM-2 can be used with Sycon's remote or in-vacuum oscillator/sensor.

The STM-2 combines the simplicity of USB connectivity with the accuracy of Sycon's measurement engine, all in a compact, cost-effective package.

FEATURES

- High Performance: 10 Measurements per second / 0.01Å/s Rate display
- Communications and power via USB
- Selectable on-board or external oscillator
- LabVIEW™ application included
- Compact case
- Low cost



Distributed Throughout Europe by:

LEWVAC

Quality Components For Vacuum Technology

LewVac LLP, Unit F2, Ote Hall Farm

Janes Lane, Burgess Hill, RH15 0SR UK.


Tel: +44 (0)1444 233372, Fax: +44 (0)1444 233392

Email: sales@lewwac.co.uk, Website: www.lewwac.co.uk

STM-2

USB THIN FILM THICKNESS / RATE DEPOSITION MONITOR

| | |
|-------------|---------------------------|
| Measurement | 10/sec, .02Hz/measurement |
| Interface | USB |
| Connectors | USB, BNC-Sensor |
| Dimensions | 4.5" L x 3" W x 1" D |
| Weight | 2 oz |
| Power Req | 400ma, 5VDC |

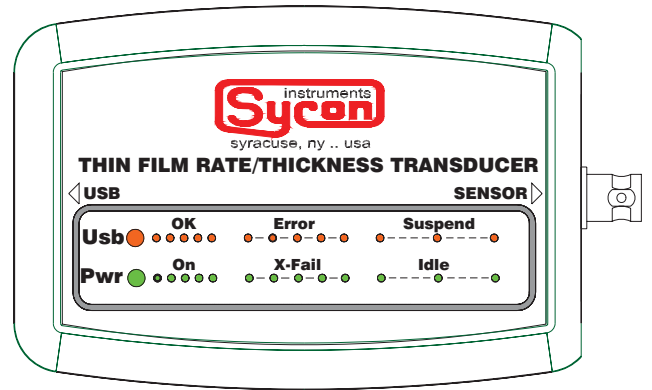

Ordering Information

500-408 STM-2¹

Options:

500-013 Remote Oscillator

500-218 In-Vacuum Oscillator/Sensor

Accessories:


500-023 10" in-vacuum cable

500-024 30" in-vacuum cable



500-025 6" Male/Male BNC cable

¹LabVIEW™ application, 6" BNC and 15' USB cables included at no charge.

Vacuum feedthroughs and sensing head per system requirements.

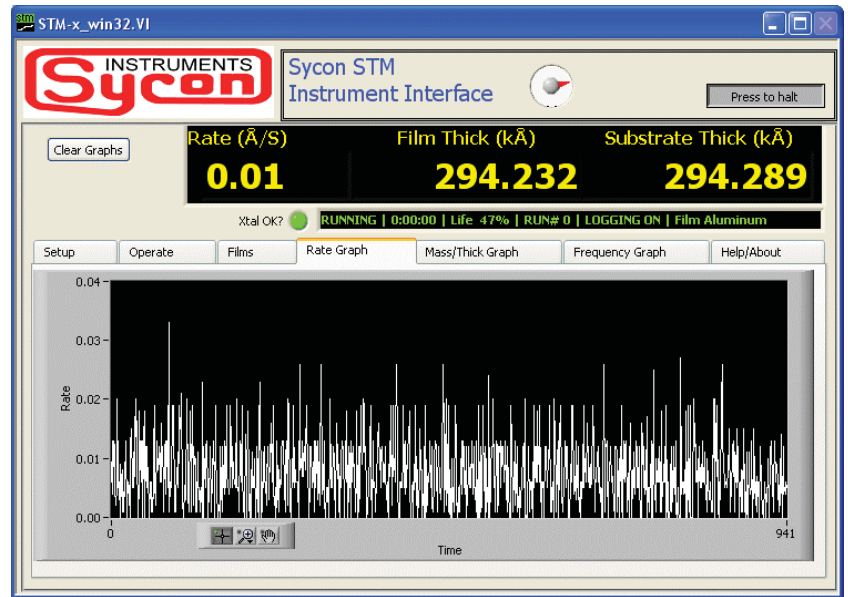

LabVIEW™ Rate Display

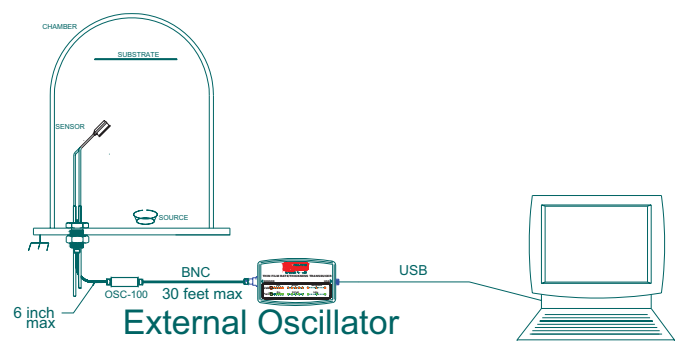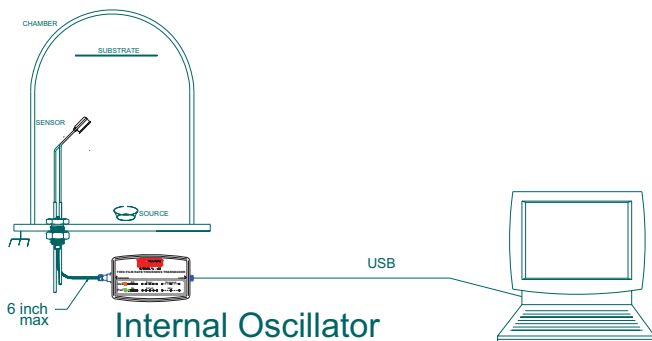

Distributed Throughout Europe by:

LEWVAC
Quality Components For Vacuum Technology

LewVac LLP, Unit F2, Ote Hall Farm
Janes Lane, Burgess Hill, RH15 0SR UK.
Tel: +44 (0)1444 233372, Fax: +44 (0)1444 233392
Email: sales@lewwac.co.uk, Website: www.lewwac.co.uk