

### Introduction

Designed for storage and transfer purposes of multiple M-SHOM flag style sample plates, this configuration is made to carry twenty double-decker M-SHOM (e.g. M-SHBSOMHM). Standard single-height M-SHOM plates can be stored in the lower part of each double spaced slot.

For other configurations of the stage please don't hesitate to contact us. Combinations with spacings for standard (single-height) M-SHOM are for instance a possibility.

The M-RECOMSTAGE(4x05H04S)N can be mounted to any of our single shaft manipulators:

M-WM40 and M-WMWA40

M-RM40 and M-GMD40

M-MD16 and M-MD40

Suitability depends on the orientation of the stage as well as the transfer length of the manipulator.

Description	Part Code
Stage of numbered receptacles for 20x double spaced slots for M-SHOM plates	M-RECOMSTAGE(4X05HO4S)N




### Specifications:

Material: stainless steel 1.4301

Fully UHV compatible

M4 thread for mounting



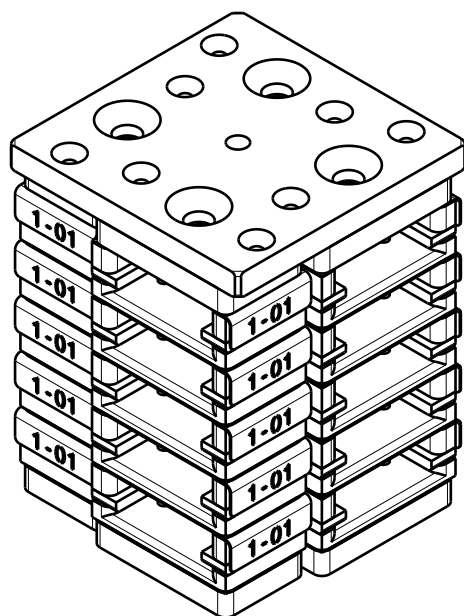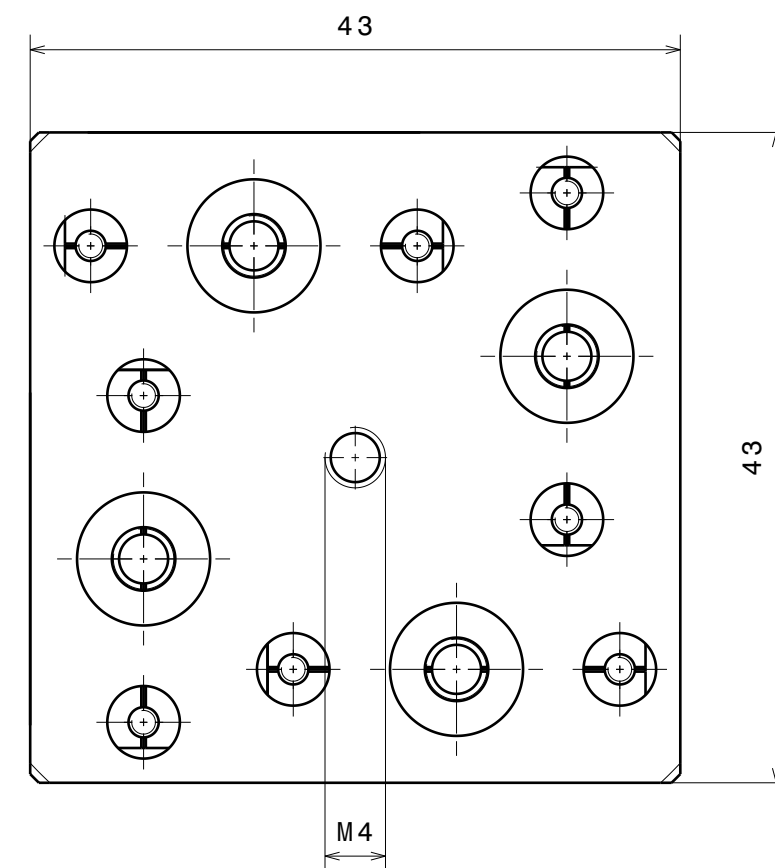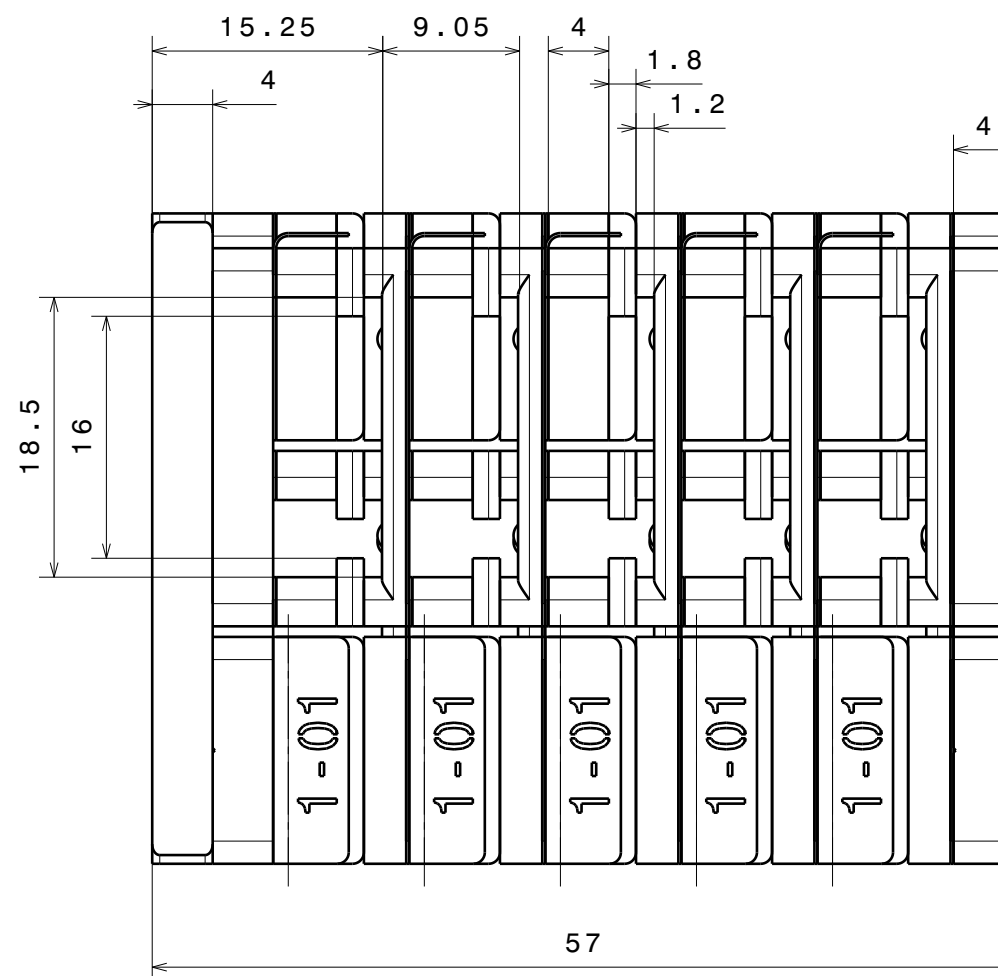

Material: fully UHV compatible		nominal dimension		over up to	1 6	6 30	30 100	100 300	300 1000	1000 2000
Numbered stage of receptables for SHOM sample plates		tolerance		±	0.05	0.1	0.3	0.5	0.8	1.2
RECOMSTAGE (20H04S) N		Scale		Drawn		C. Weiss				
		2:1		Date		12.05.2014				
				Changed		31.10.2016 CW				
<b>Ferrovac GmbH</b> <b>CH-8050 Zurich</b>		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERROVAC GMBH. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT OUR PERMISSION IS PROHIBITED.		Rev.		B		RECOMSTAGE (20H04S) N		
								A3 sheet 1/1		