


VSM17-X Translation Stage

Modular UHV Linear Sample Transporter

AML ultra high vacuum compatible modular linear translation stages provide translation for loads of up to several tens of kilograms. They can be used standalone or as part of a complex motion system, as they are compatible with the range of VSM17 modular stage. They have very high rigidity, which is necessary where several transporters are stacked for compound motion or where offset loads are present. They are manufactured with UHV compatible material and construction methods and utilise AML UHV stepper motors.

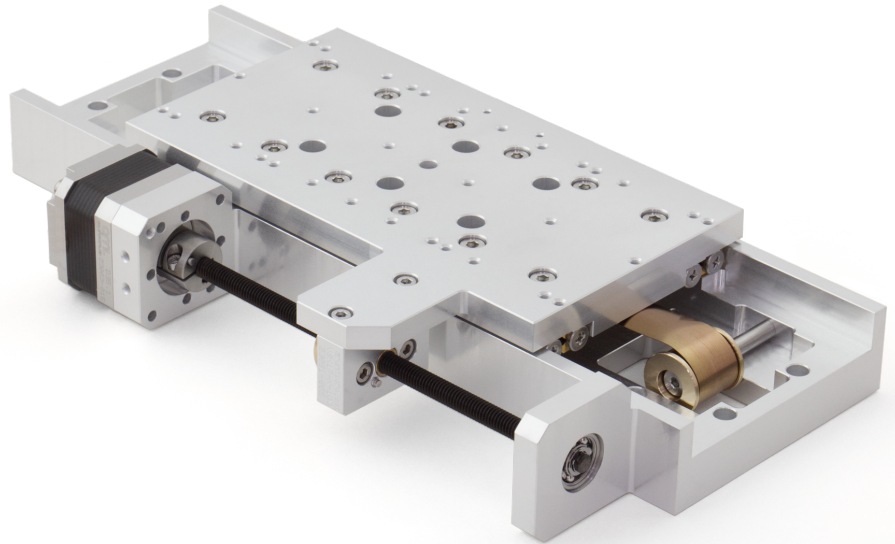

FEATURES



- Standard travels from 50 to 200 mm
- 5 μm resolution (1 μm for option HR)
- Better than 0.5 μm repeatability
- Maximum speed 15 mm/s (3 mm/s for option HR)
- Suitable for use to 1×10^{-10} mBar
- UHV-prepared aluminium construction as standard
- Stainless steel construction available (option SS)
- Bakeable to 150°C (200°C for option SS)
- Features AML D35.1 stepper motor
- Can optionally be fitted with limit switches or an optical encoder
- High resolution, radiation resistant and dry lubricated versions available
- Directly stackable for XYZ orientations
- Compatible with all VSM17 modular stages
- May be customised for specific requirements

SPECIFICATIONS

Specification	VSM17-X-050	VSM17-X-100	VSM17-X-150	VSM17-X-200
Travel	50 mm	100 mm	150 mm	200 mm
Resolution	5 μm (1 μm for option HR)			
Maximum Speed	15 mm/s (3 mm/s for option HR)			
Repeatability	Better than 0.5 μm			
Centred Load Capacity (Normal)	50 kg			
Maximum Load Moment	30 Nm			
Axial Load Force @ 500 Hz 1 A Phase Current	15 kg			
Backlash	Less than resolution			
Roll, Pitch and Yaw (Unloaded)	$\pm 48 \mu\text{rad}$	$\pm 90 \mu\text{rad}$	$\pm 80 \mu\text{rad}$	$\pm 70 \mu\text{rad}$
Roll, Pitch and Yaw Compliance	16 $\mu\text{rad/Nm}$	32 $\mu\text{rad/Nm}$	29 $\mu\text{rad/Nm}$	26 $\mu\text{rad/Nm}$
Straightness of Travel	3 $\mu\text{m}/100 \text{ mm}$			
Leadscrew Accuracy	0.027/100 mm			
Stepper Motor	AML D35.1			
Vacuum	$1 \times 10^{-10} \text{ mBar}$			
Maximum Temperature	150°C (200°C for option SS) (reduces to 120°C when an optical encoder is fitted)			
MTBF (5 kg load and 30% duty cycle)	15,000 hrs			
Mass Including Motor	1 kg	1.6 kg	2.1 kg	2.7 kg
Mass Including Motor (option SS)	2.2 kg	4.4 kg	6 kg	8 kg

NOTES

MATERIALS: The major components of standard stages are manufactured from 6061 T6 aluminium. The material surface is processed to obtain a thin, dense aluminium oxide coating which reduces diffusion and desorption at UHV. A 304L stainless steel version can be specified using option code "SS".

BACKLASH: Backlash in the gearbox of the VSM17-X is controlled by special gearing and is negligible. Backlash between the nut and leadscrew, and axial float in the bearings is controlled by a constant force spring and is much less than the resolution. If the transporter is used for motion with a significant vertical component ($>30^\circ$), the load provided by the carriage weight is sufficient to eliminate backlash and the spring can be removed. In these cases, mount with the motor at the top. Since speeds are low, acceleration forces are negligible.


ROLL COMPLIANCE: Multiple-axis mechanisms can produce varying roll moments about the bottom transporter. The VSM17-X carriage will deflect about the roll axis at 5 μradian per Nm. To achieve this performance the transporter must be fixed to an extremely rigid, flat baseplate, using all of the base fixings.

LUBRICATION: Running surfaces are dissimilar materials or dry lubricated with molybdenum disulfide. Leadscrews are lubricated with Nyetorr® 6300 UHV grease. Dry lubrication can be specified.

VERNIER STOP: These transporters may be driven to the vernier stops at the limits of their travel and stalled without damage.

STACKED MECHANISMS: For multi-axis motion, mount the stage moving the load vertically on top of the others to avoid adding their weight to its load.


RELATED PRODUCTS

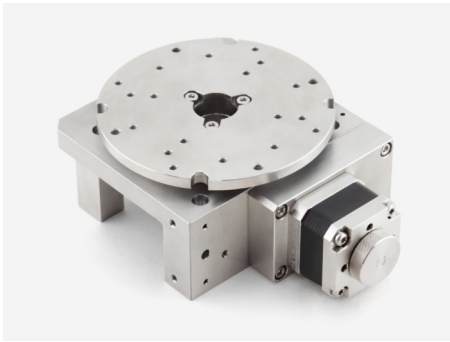

VSM17-R

High Performance, Modular UHV Rotation Stage.


Rotation stage suitable for use in UHV. Can support loads of up to 100 kilograms. Resolutions from 0.1° to 0.005° with 360° of continuous rotation.

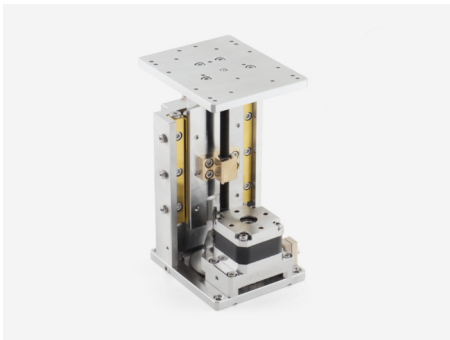

VSM17-Z

High Performance, Modular UHV Stage for Z-Axis Translation.

Linear vertical translation stage suitable for use in UHV. Can support loads of up to several kilograms and travel from 50 mm. Designed specifically for Z-axis translation with its high load capacity.

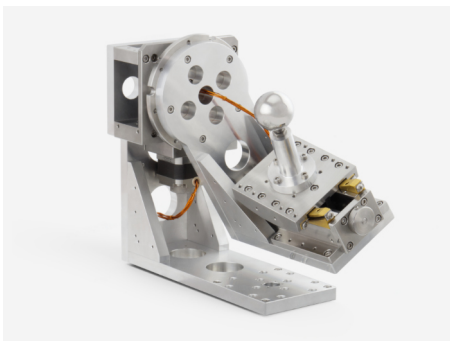

VSM17-G

High Performance, Modular UHV Goniometer Stage.

Goniometer stage suitable for use in UHV. It is possible to build a Euler goniometer with a common centre of rotation.

ORDERING INFORMATION

Order Code	
VSM17-X-xxx	Linear stage (xxx=travel in mm)
VSM17-X-xxx-SS	Linear stage, stainless steel
VSM17-X-xxx-HR	Linear stage, 1 µm resolution
VSM17-X-xxx-LS	Linear stage with 2 x limit switches
VSM17-X-xxx-EA	Linear stage with encoder (incremental)
VSM17-X-xxx-EA	Linear stage with encoder (absolute)
VSM17-X-xxx-R	Linear stage, radiation resistant
Example Order Code	
VSM17-X-100-HR-LS-R	Linear stage, 100 mm travel, 1 µm resolution, limit switches, radiation resistant.



Arun Microelectronics Ltd.
Unit 2, Bury Mill Farm
Bury Gate
PULBOROUGH
RH20 1NN
United Kingdom

Tel: +44 (0)1903 884141
Email: sales@arunmicro.com

AML pursues a policy of continuous improvement and reserves the right to make detail changes to specifications without consultation. E and OE.